ASSEMBLY INSTRUCTIONS

MODEL#:RL7951/3

the technical personnel can be allowto fix and maintain.

NT!

hat the power is switch off at the electricity mains supply encing work.

TRUCTIONS

ts according to the bag as shown in figure B shows, installed n screw, and should be fixed to the ceiling in the right place. nnection (See picture 1): there are one tapping hole & two

upply ground wire (2) on the green ground screw (15) and then put

e. Connect the fixture ground wire (3) with supply ground wire ecting terminal (12). Caution: DO NOT connect ground wire with r wire.
Fixture supply wire with power supply wire . Caution: Remember uish the positive and negative charges. (See picture 2)
opy up to the ceiling and Lock cuttlefish nut

CEMENT BULB

eed the maximum wattage.
s recommended: RL7951/3-G9-4x40W Max. Type G9.

NG CARE

a soft dry cloth.

INFORMATION

d must in rated voltage, and do not touch the bulb with bare hands switch off the electricity supply and allow to cool for 10 minutes anging the light bulbs.

external cables have been demaged, Pls change or repair by rer or service agency or professional electrician, In order to danger.

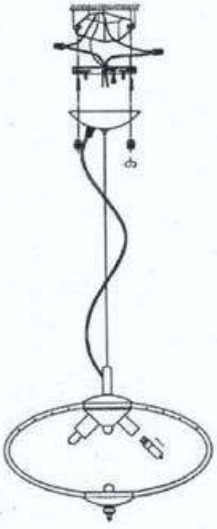



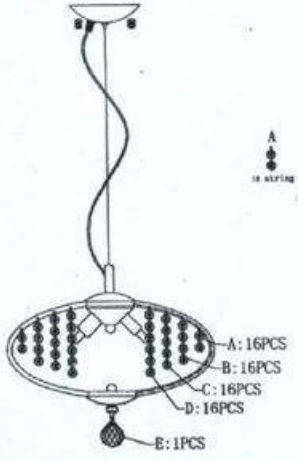



A